

**ANXELL**



# VDP-150

IP Video Intercom System





Install the free “**Tuya Smart**” APP and smart control your home.

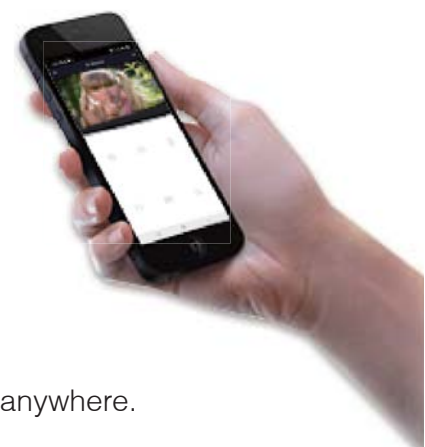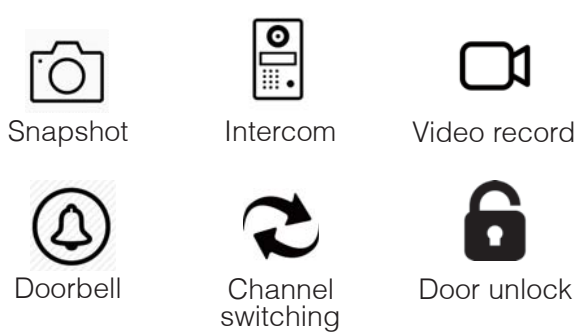

You will never miss a visitor anymore.  
Answer the door and remote unlock anytime & anywhere.

# VDP-150

## Standard Features



### Ultra-Thin Design

Indoor unit adopts a ultra-thin design



### Intuitive UI

Easy-to-follow user interface



### 7" Touch Screen

Multi-point, 7" 1024 x 600 capacitive touch screen



### TF Memory

Supports TF memory card (max 64GB)



### Expandable System

Can connect with up to 6 monitor stations



### Monitor Station

Can connect to 2 video door stations and 2 cameras



### WiFi Capability

Monitor station can connect to Wi-Fi and add 5 APP users.



### Multiple Functions

Monitor/ Unlock/ Video Intercom/ Motion Detection/ Footage Record and Playback



### Multiple Languages

Supports English, Russian, French, Spanish, German and Simplified Chinese



### Ringtone

Provides 10 different ringtones



### Extends to 5 Monitor Stations

The main indoor station can connect with 5 additional monitor stations



### Remote Control

Tuya Smart APP allows monitoring and unlocking via smartphones and supports communication with visitors

### Warranty

The product is warranted against defects in material and workmanship while used in normal service for a period of 2 year from the date of sale to the original client. The ANXELL policy is one of continual development and improvement; therefore ANXELL reserves the right to change specifications without notice.



Monitor Station VMT-107	
<b>Display</b>	7-inch TFT LCD Touch Screen (16:9)
<b>Resolution</b>	1024 x 600 HD
<b>Video System</b>	PAL/NTSC compatible
<b>Intercom mode</b>	Semi duplex communication
<b>Conversation Duration</b>	120 seconds
<b>Operating Voltage</b>	12 VDC
<b>Current Draw</b>	650 mA (working) 30 mA (standby)
<b>Power consumption</b>	7.8 Watts
<b>Data Communication</b>	4-wire cables, WiFi Tuya solutions
<b>Power supply</b>	Input: 100~240V (50~60Hz) ,Output: 12VDC /1A
<b>Operational temp.</b>	-10°C~55°C
<b>Installation</b>	Surface mount
<b>Extension Memory</b>	Supports max. 64GB TF card
<b>Video Format</b>	Supports AHD1080, 720V, CVBS
<b>Dimension</b>	220 x 135 x 23 mm


Video Door Station ODS-100	
<b>Camera Sensor</b>	1/3 CMOS, AHD1080P HD camera, 2.2MM Lens
<b>Camera View Angle</b>	120-degree
<b>Resolution</b>	AHD 1080P
<b>LED</b>	Night vision compensation
<b>Operating Voltage</b>	12 VDC
<b>Current Draw</b>	200 mA (working) 30 mA (standby)
<b>Data Communication</b>	4-wire connection to monitor station
<b>Operating Temperature</b>	-20°C~60°C
<b>Dimensions</b>	135 x 88 x 35 mm
<b>Relay</b>	dry contact: NC, COM, NO
<b>Material Housing</b>	Aluminum alloy/ Silver Finish
<b>Weatherproof</b>	IP65
<b>Call buttons</b>	direct call, name plate and light transparent
<b>Installation</b>	Surface mounted

## Video Door Stations ODS-200

<b>Camera</b>	1/3 CMOS, AHD1080P HD camera, 3.6MM Lens
<b>Camera View</b>	90-degree
<b>Resolution</b>	AHD 1080P
<b>LED</b>	Night vision compensation
<b>Operating Voltage</b>	12 VDC
<b>Current Draw</b>	200 mA (working) 30 mA (standby)
<b>Data Communication</b>	4-wire connection to monitor station
<b>Operating Temperature</b>	-20°C~60°C
<b>Dimensions</b>	130 x 54 x 39 mm
<b>Relay</b>	dry contact: NC, COM, NO
<b>Material Housing</b>	Aluminum alloy/ Silver Finish
<b>Weatherproof</b>	IP65
<b>Call buttons</b>	direct call, name plate and light transparent
<b>Installation</b>	Surface mounted


## Dimensions

220×135×23mmmm

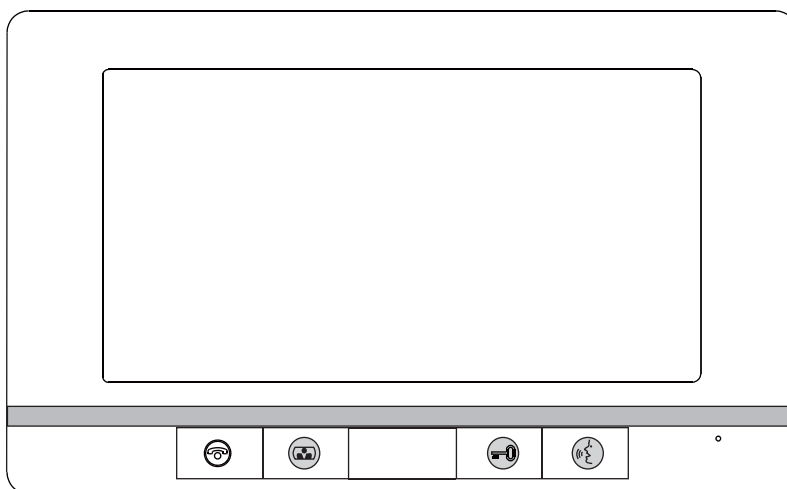


**VMT-107**

135×88×35mm

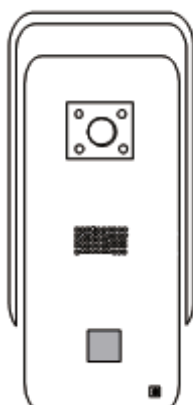

**ODS-200**

130×54×39mm

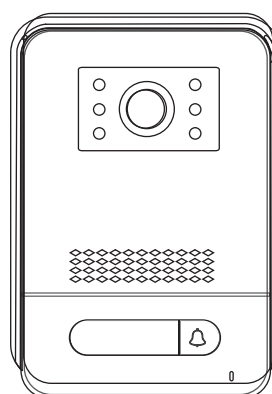

**ODS-100**